



Technical Data

Specification & Capacities

MPK06

S.N: _____



2,2kW / 3HP



1,7 – 2,3m



600kg

[m] [kg]




Via Campardone, 1
31014 Colle Umberto – Italy
Tel. +39 0438 1710083
Mail: info@jekko.it
Web: www.jekko.it

Date	Jun. 15 th 2018
REV.	DRAFT

MPK06 - OVERALL DIMENSIONS

MPK06

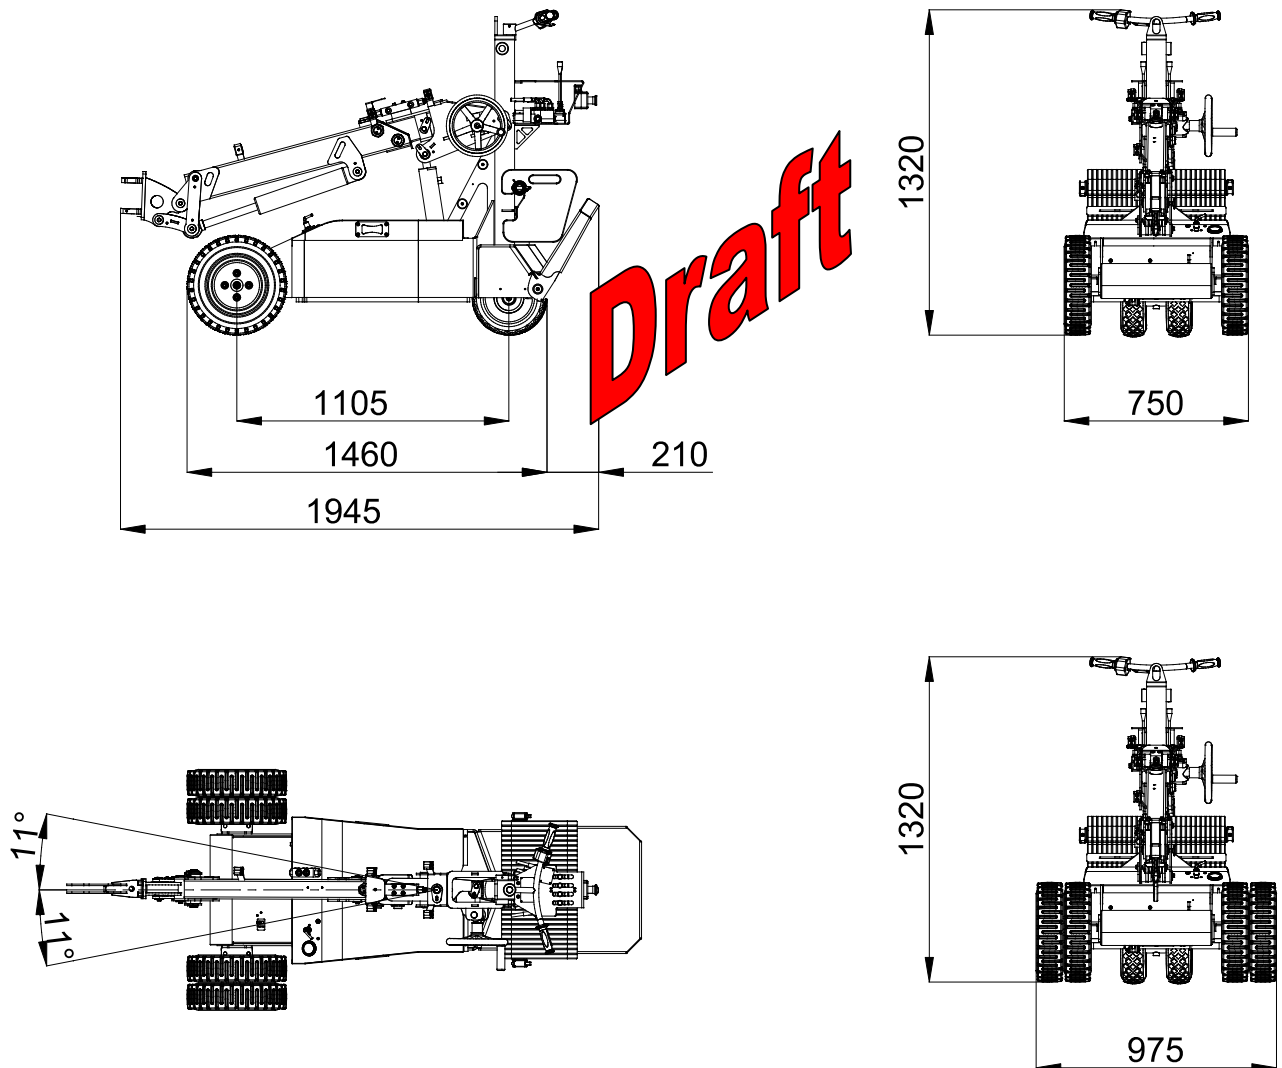


WEIGHTS		Name / version	kg ¹
			570
			240
		HOOK HEAD	3,2
		HOOK HEAD w EXTENSION	7,5
		GVI 4+2LX	50

¹: Dry weight

Draft


ELECTRIC		24V 159Ah	
		2,2 kW / 3 HP	
HYDRAULIC		Working temp	<70°C
		L	
MOVEMENTS		km/h	
			
		kg/cm ²	
		0°/75°	
		s	14
		±11°	
		m	1,7 - 2,3
		s	

MPK06 – HOOK HEAD

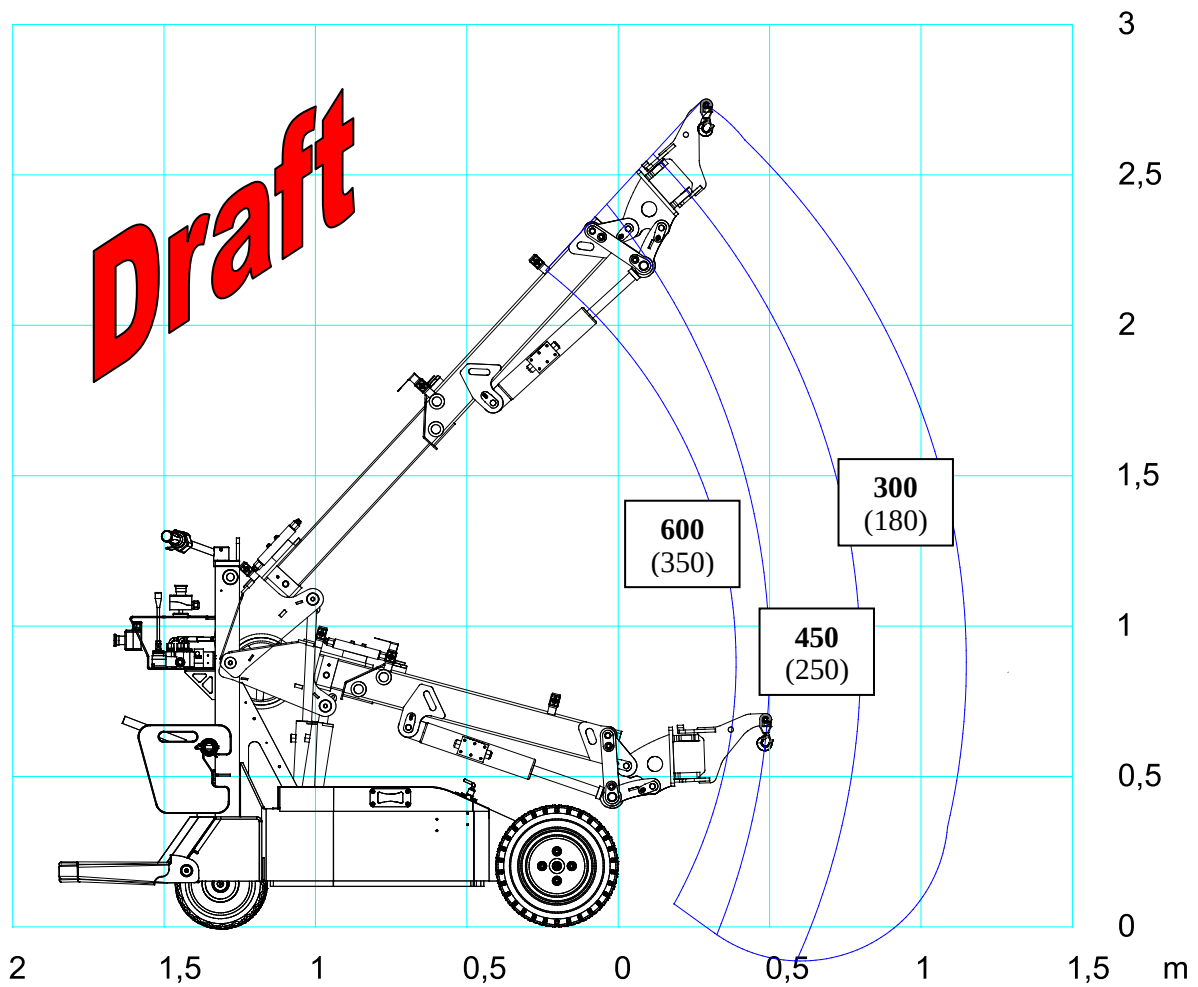


kg with CW
(kg w/o CW)

MPK06 – HOOK HEAD With EXTENSION

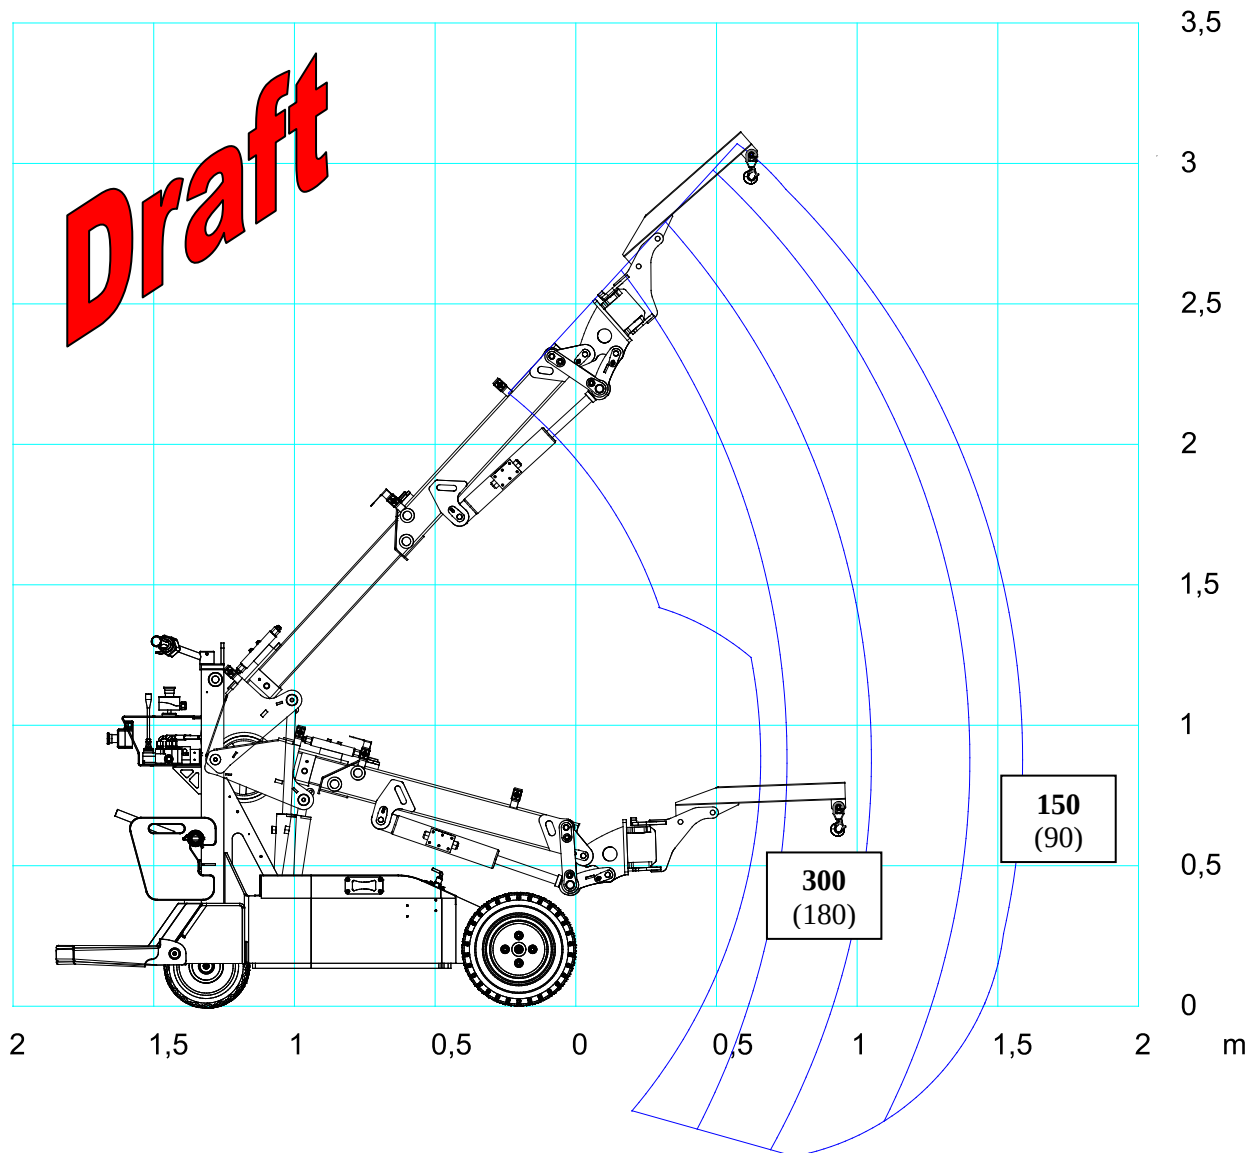

kg with counterweight
(kg w/o counterweight)

MPK06 – GVI4+2LX

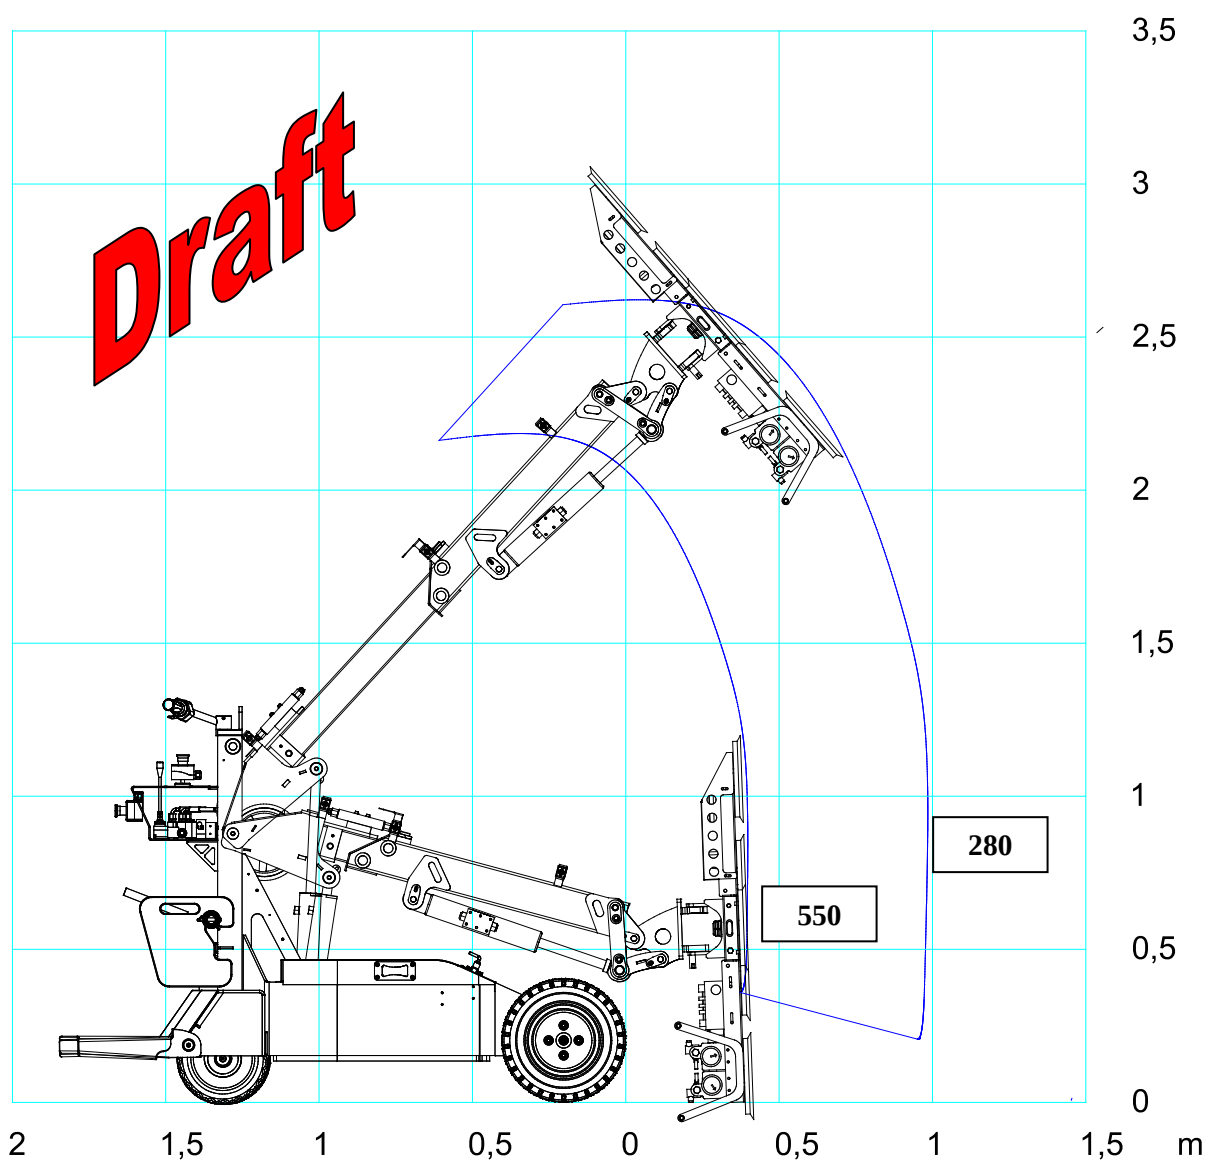


kg with counterweight
(kg w/o counterweight)



ACCESSORIES

ATTACHMENTS & TOOLS

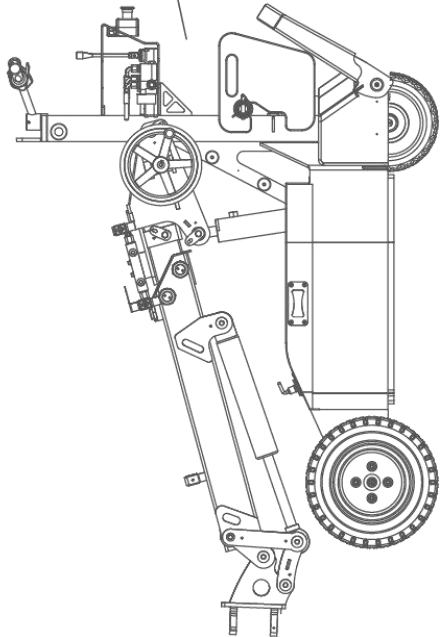

ME01-MPK06






QC-MPK06.0

MPK06





	STD	PC-01	PC-11
Boom, covers and outriggers	RAL2004	RAL____	RAL____
Chassis, frames and tanks	RAL7021	RAL7021	RAL____

ACCESSORIES FEATURES



HOOK HEAD



HOOK HEAD With EXTENSION

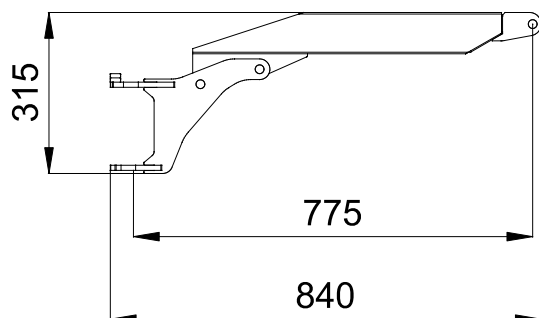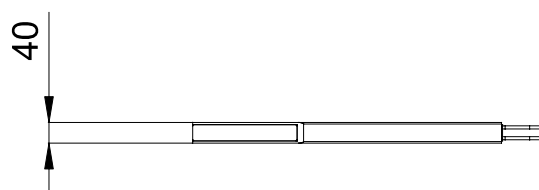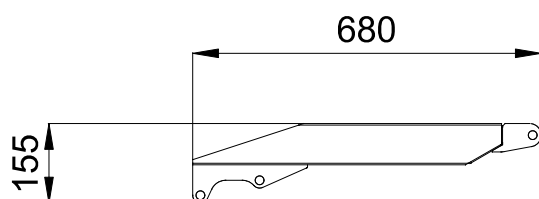

QC-MPK06.00 to connect GVI4+2L

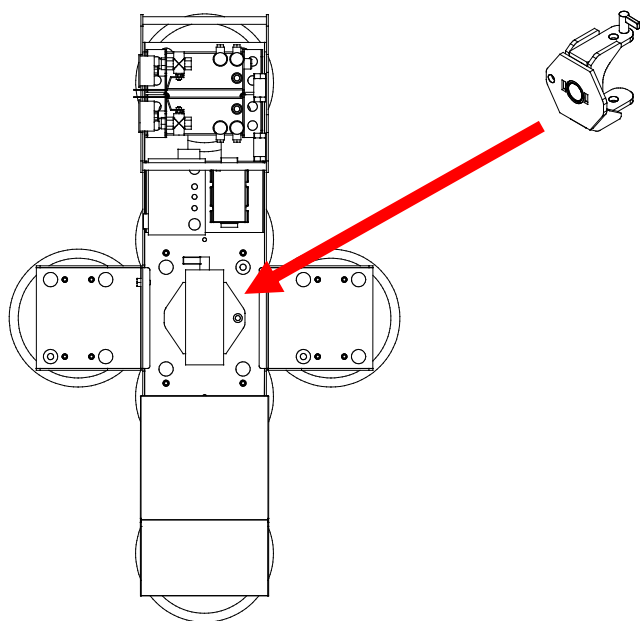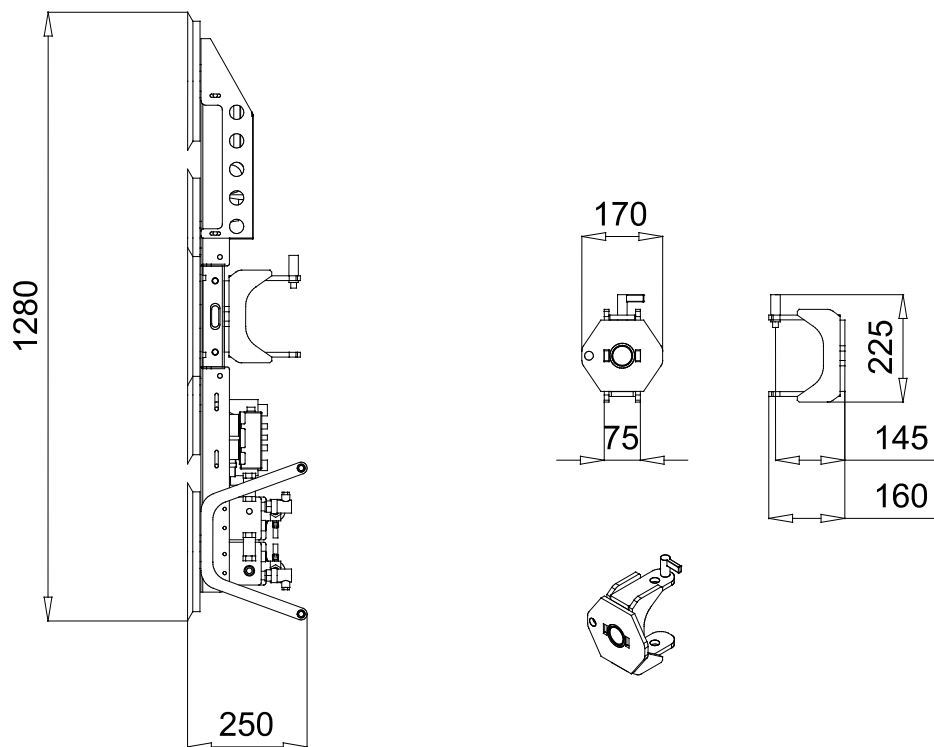

SYMBOLS


	Weight		Chart Wheels		Engine		Jib lenght and angle
	Counterweight		Minipicker		Diesel Fuel		Jib Lenght
	Crane		Back Wheel Point Loading		Gasoline Fuel		Jib Radius
	Travel Speed		Front wheel Point Loading		Tank		Hydraulic Jib Lenght
	Gradeability		Travel Speed		Battery		Hydraulic Jib Radius
	Outrigger Load		Gradeability		Power		Mechanical Jib Lenght
	Track Loading		Working Radius		Boom Angle		Mechanical Jib Radius
	Outriggers Setup		Hookblock		Boom Lenght		Manipulator Lenght
	Ext Tracks Width		Slewing		Boom Radius		Manipulator Radius
	Chart On Tracks		Slewing Locked		Jib Hook Radius		Maximum inclination of the machinery
	Jib on board		Without jib on board		Standard		Stabilizing bar
	Horizontal boom angle		Number of vacuum pads		Factory max. load		Building site max. load
	Powerpack		Outriggers mats		Winter warm-up kit		Hydraulic oil

Remarks referring to load chart

- The load charts are calculated according to EN 13000.
- For the calculation of the load charts at least a wind speed of 9m/s (33km/h) and regarding the load a sail area of 1m² per ton load and a wind resistance coefficient of 1.2 on the load have been taken into account. For lifting of loads with large sail areas and/or high wind resistance coefficients the maximum wind speed as stated in the load charts has to be reduced.
- Lifting capacities are given in kilograms.
- The weight of the hook blocks and hooks is part of the load and therefore it must be deducted from the lifting capacities.
- Working radii are mesured from the slewing centre.
- The lifting capacities given for the telescopic boom apply if the folding jib is removed.
- Subject to modification of lifting capacities.



NOTES

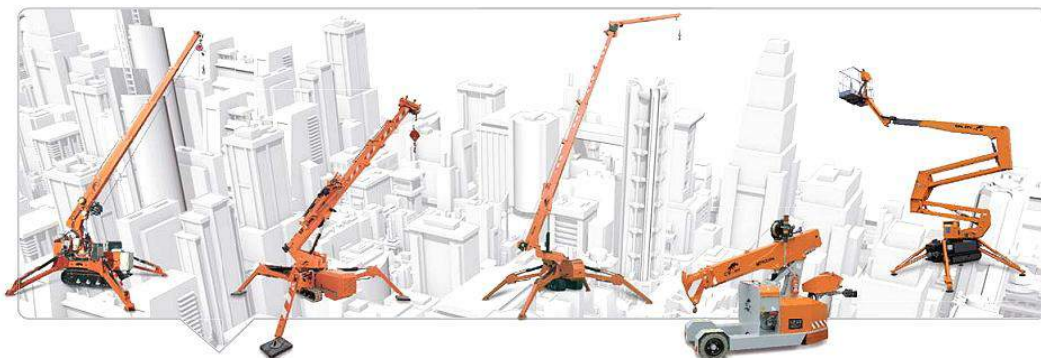

DEALER



JEKKO S.r.l. via Campardone, 1 Z.I. 31014 Colle Umberto (TV) Italy
tel. +39 0438 1710083 fax +39 0438 1710123
www.jekko.it - info@jekko.it