

# SPX429

**max** 2940 kg

3560 x 780 x 1955 mm

**max** 17 m

**max** 11 m

The top of the range mini crane. Technology, innovation and reliability enclosed in the best-seller mini crane ever.



## Technical Information

Dimension	L x W x H	3560 x 780 x 1955 mm
Stab. Area		3730 x 3730 mm

		Kg
Crane & Options Weights	SPX429CDH	2280
	SPX429C+	2280
	/	200
	2.5T-D7	20
	PP400-4DX PP220-4DX PP220-2DX	45
	JIB800GX JIB800.2H1MX MV600.3E+ MR800.4-6+4P	25 170 200 300


SPX429CDH	Petrol Engine	KUBOTA D722-E3B	14.9 kW 20 Hp
SPX429C+	Standard or Lithium Battery	N.4 BATTERIES 6V, 420Ah	4.0 kW 5.5 Hp

Speed		1.8 km/h (CDH) 0.72 km/h (C+)
Gradeability		20°
Ext. Tracks		770-1100 mm




## Winch & Fall Stages

Main Winch	980 kg (Single line) 51 m - Ø 8 mm 24,4-33,2 m/min.
------------	---

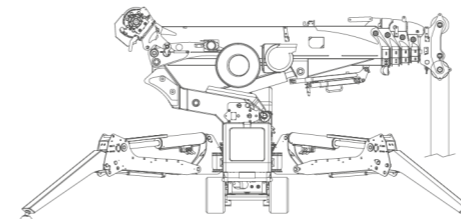


Max. Capacity	Line	Metres
<b>max</b> 2700 kg	3	-19 m
<b>max</b> 1950 kg	2	-31 m
<b>max</b> 980 kg	1	-64 m

## Load Chart

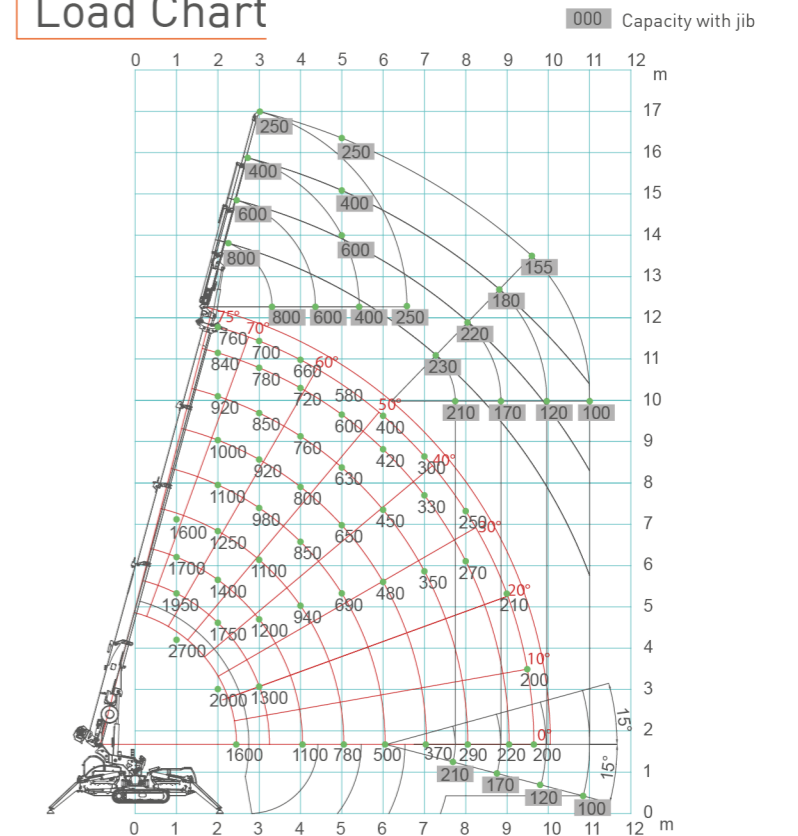

## Dimensions

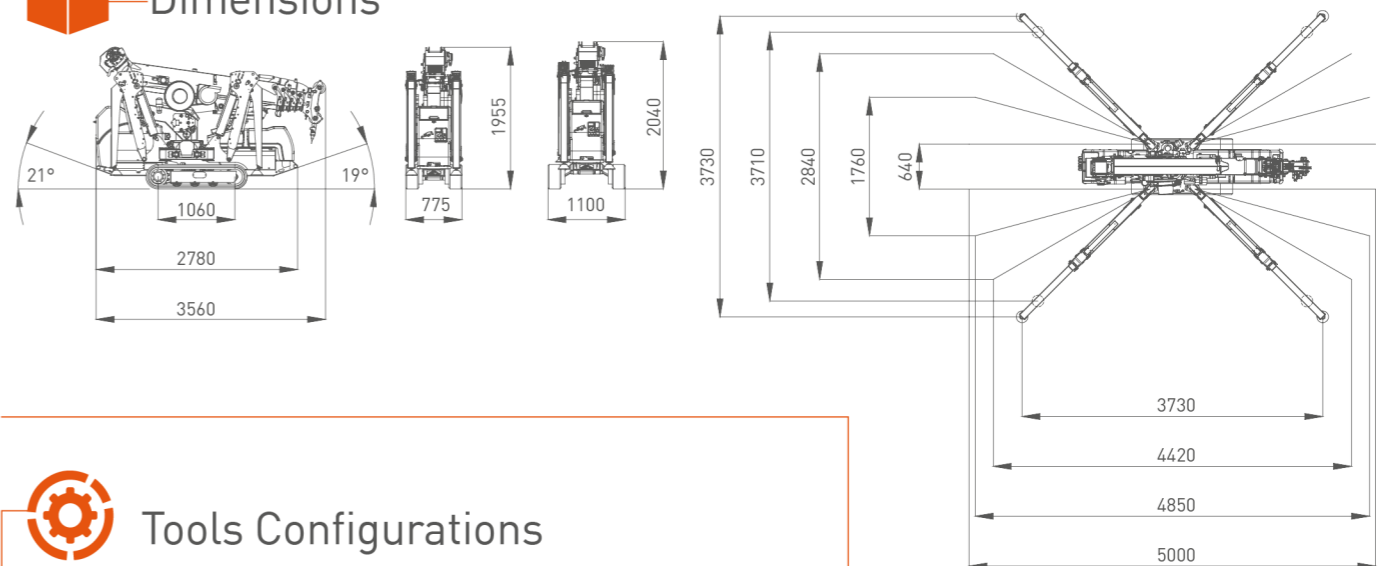

## Tools Configurations

	JIB800GX	JIB800.2H1MX	MV600.3E+	MR800.4-6+4P	JIB301/2GR
<b>max</b>	800 kg	800 kg	600 kg	800 kg	300 kg
<b>max</b>	740 kg @ 12.5 m	250 kg @ 17 m	400 kg @ 12 m	400 kg @ 13 m	300 kg @ 10.7 m
<b>max</b>	180 kg @ 10.2 m	100 kg @ 11 m	160 kg @ 7 m	130 kg @ 7 m	300 kg @ 7 m

## Crane Options

**Battery Options**

BP-LT-SPX312-424

**Battery Chargers**

BC-220V60A

BC-110V60A

**J-Connect**

J-CON  
J-CON-Y2

**Electric Power Pack**

PP220-2DX

PP220-4DX

PP401-4DX

**Attachments & Tools**

HA-SPX429

VAI

RC-SPX\_B  
RC-SPX\_C

WUK-02

WT-2007242

EXT-209/312/424

OM400

JIB800GX

JIB800.2H1MX

QC-MV600A

MV600.3E+  
+ Steel Holder

QC-MR800D

MR800.4-6+4P  
+ Steel Holder

JIB301GR

JIB302GR

- A2B
- BPI
- CCI
- DTC
- EXT
- GSC
- LMI
- P&C
- PPA
- SCI
- TH
- VW
- RCD
- 2SW
- 2ST