

# SPX532

**MAX** 3200 kg

**LxWxH** 3120 x 770 x 1950 mm

**max** 17,3 m  
with jib

**max** 14,8 m  
with jib

The user-friendliest crane ever, featuring the most advanced stability system. A top level performance is ensured with this new generation mini crane.




## Technical Information

Dimensions	<b>LxWxH</b>	3120 x 770 x 1950 mm
Stab. Area		4400 x 4400 mm

Crane & Options Weights		Kg
	SPX532CDH	2320
	/	200
	Multiple Fall	40
	JIB	200
	Manual Ext.	14
	Jib Pulley Head	8

SPX532	Diesel Engine	KUBOTA D902-E4B	16.1 kW 22 Hp
--------	---------------	-----------------	------------------

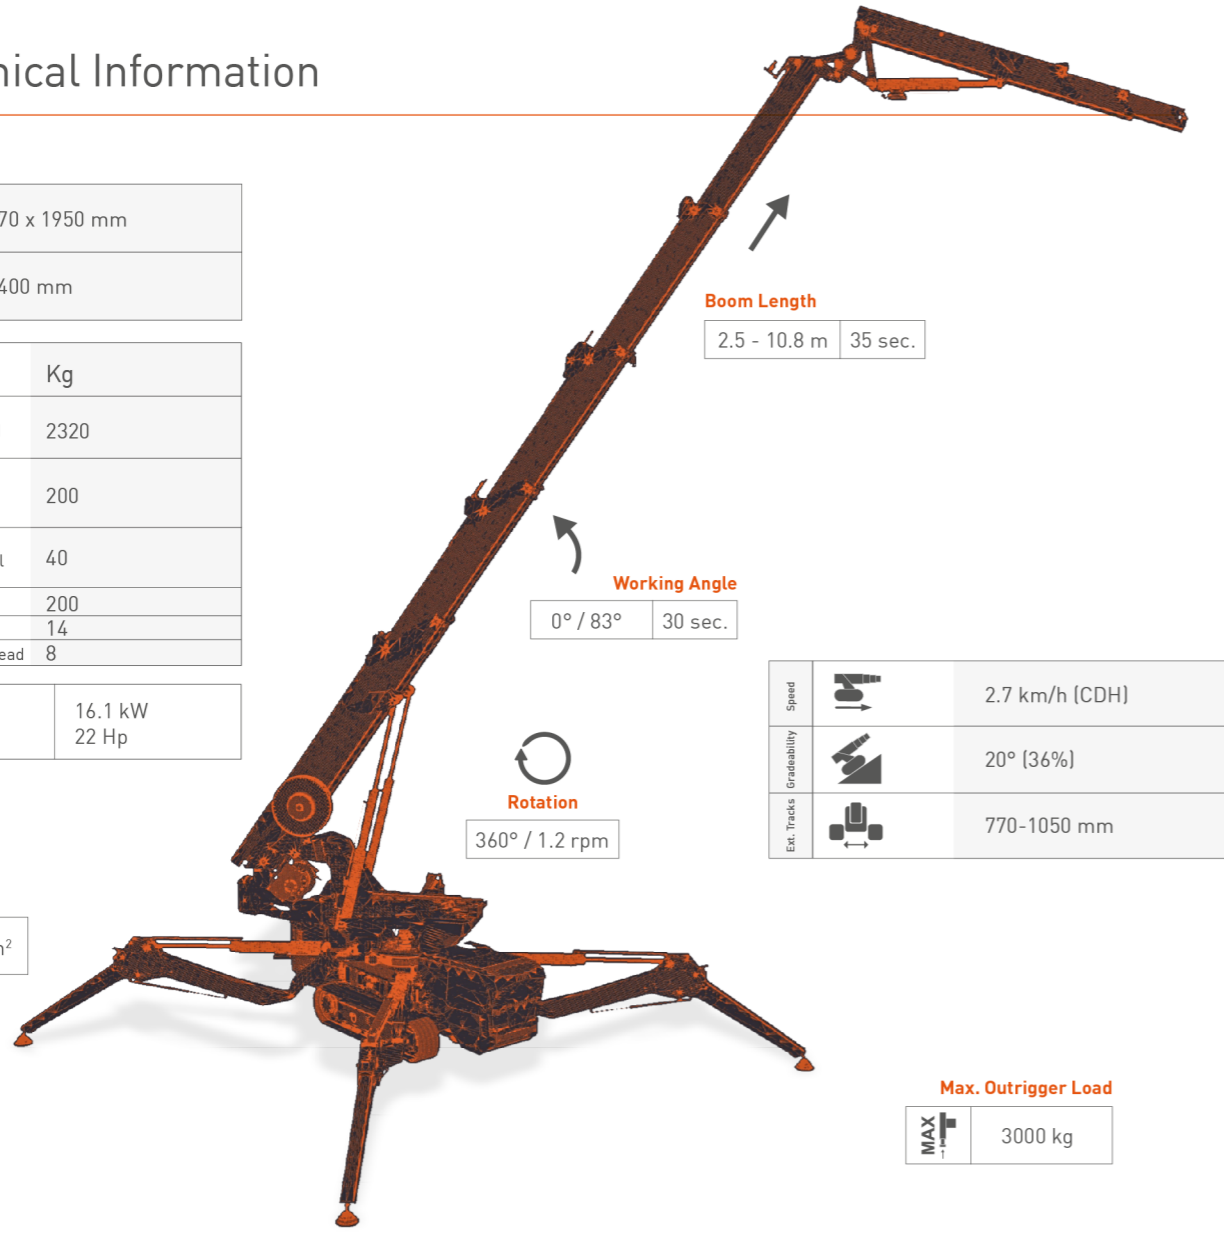

**Boom Length**  
2.5 - 10.8 m | 35 sec.

**Working Angle**  
0° / 83° | 30 sec.


**Rotation**  
360° / 1.2 rpm

Speed		2.7 km/h (CDH)
Ext. Tracks Gradability		20° (36%)
Ext. Tracks		770-1050 mm

**Max. Track Load**  
 0.63 kg/cm<sup>2</sup>

**Max. Outrigger Load**  
 3000 kg

## Load Chart\*

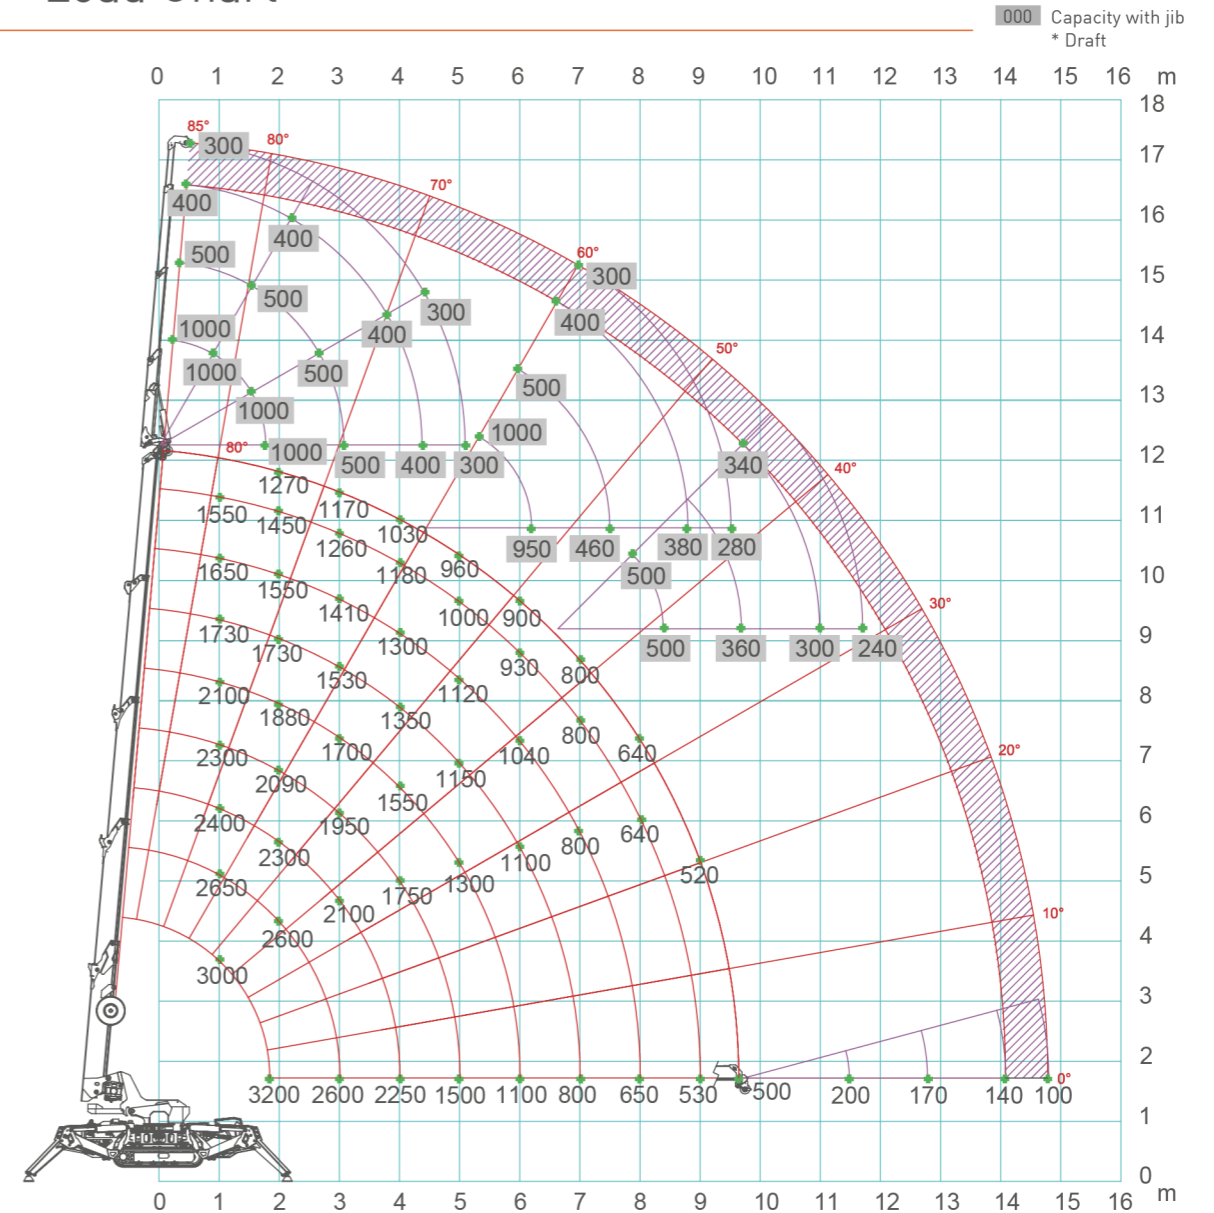

## Crane Options

**Lithium Battery Options**

- BP-LT-SPX532

**Battery Chargers**

- BC-220V60A
- BC-110V60A

**J-Connect**

- J-CON
- J-CON-Y2

**Electric Power Pack**

- PP400-6.B

**W800.6 2.5T-D7**

**OM400.1**

**Attachments & Tools**

- JIB1000GX
- JIB10002H1MX
- QC-JVM
- JVM + Steel Holder
- JIB-GR
- JIB-GR

## Dimensions

